



**Bobcat**®

**MT55**

Mini Tracked Loaders



## Machine Rating

Rated operating capacity	254 kg
Tipping load	732 kg
Pump capacity	45.4 l/min
System relief at quick couplers	200 bar
Travel speed, forward	5.6 km/h
Travel speed, reverse	2.3 km/h

## Engine

Make / Model	Kubota / D902-E3B
Fuel / Cooling	Diesel / Liquid
Power	17.5 kW
Torque at 2600 RPM (ISO 9249)	54.2 Nm
Number of cylinders	3
Displacement	0.9 l
Fuel tank	26.5 l

## Weights

Operating weight	1186 kg
------------------	---------

## Controls

Vehicle steering	Direction and speed controlled by one hand lever
Loader hydraulics tilt and lift	Hand lever

## Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---


## Standard Features

Auxiliary hydraulics	Parking brake
Bob-Tach™	Reverse travel stop panel
Built-in tie down and crane/lift locations	Spark arrestor muffler
Hydraulic drive train	Tilt lockout
Instrumentation	Tracks — rubber — 180 mm
Lift arm lockout with manual bypass	CE certification
Lift arm support	Warranty: 12 months or 2000 hours, whichever occurs first
Neutral start interlocks	

## Options

Attachment control kit	Light kit
Catalytic exhaust purifier	Ride-on platform
Engine block heater	Shutdown kit

## Dimensions

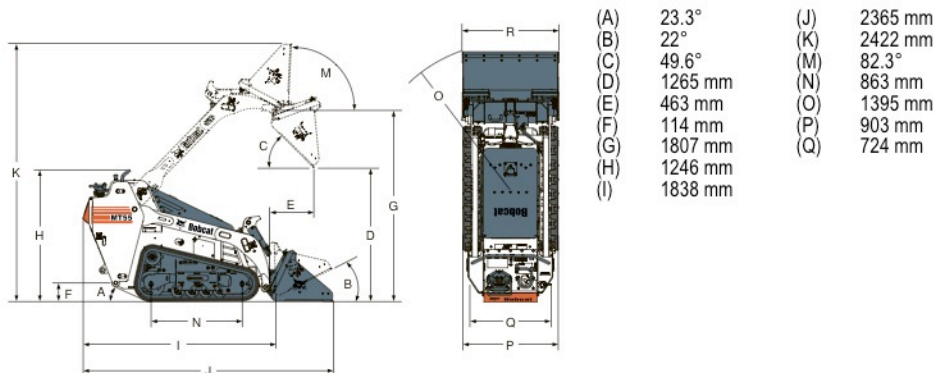

## Attachments

- Angle broom
- Auger
- Bucket
- Combination bucket
- Hydraulic breaker
- Landplane
- Pallet forks
- Snow blower
- Soil conditioner
- Stump grinder
- Tiller
- Trencher
- Utility blade
- Utility forks
- Utility grapple

### Megatron EAD

2A Samokovsko shosse str.  
1138 Sofia  
Tel.: +359 2 975 1 555 Fax: +359 2 973 72 25  
bobcat@megatron.bg  
www.megatron.bg



www.bobcat.eu